


H1 US Model



H1 European Model

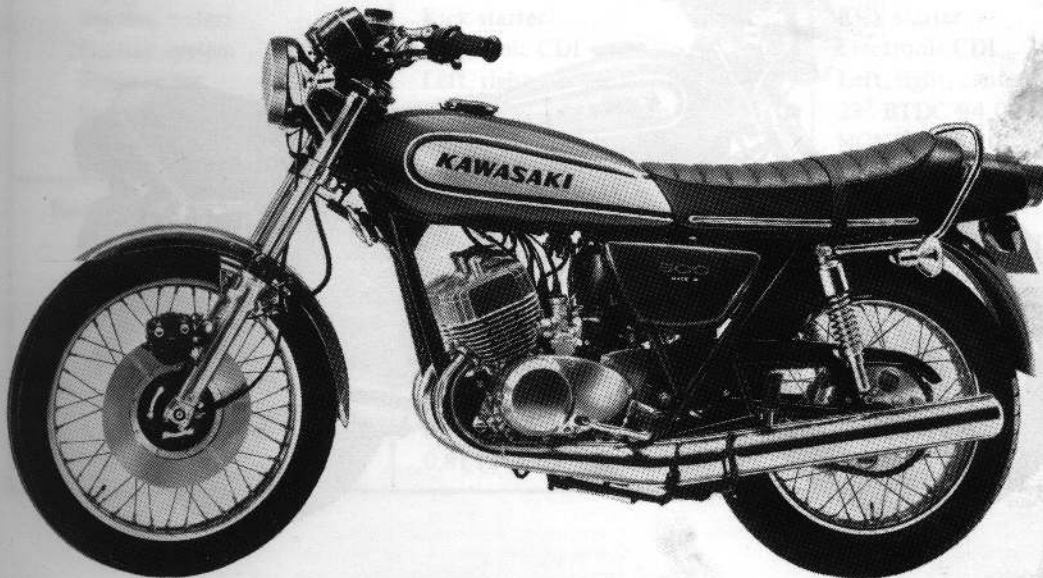

321500

H2C

1600M 2U SH

17.085 mm) \*2,125 mm  
(83,5 mm) \*8,25 mm  
11,140 mm  
55,5 in. (1,411 mm)

63.1 in. (2,110 mm) \*2,175 mm  
32.7 in. (831 mm)  
46.5 in. (1,180 mm)  
57.0 in. (1,448 mm)  
2.5 in.

25.8 in. (655 mm) \*2.5 in. (63.5 mm)  
18.5 in. (468 mm)

1700 rpm  
10.5 in. (266 mm) \*1.5 in. (38 mm)

20° ATR  
20° ATR  
29.5 ATR  
39.5 ATR  
57° ATR  
64° ATR  
54.5 in. (1,384 mm)  
1.5 in. (38 mm)

57° BTR  
75° BTR  
50° BTR  
58° ABR  
20° ATR  
20° ATR  
20° ATR  
20° ATR  
20° ATR

1.5 in. (38 mm)

1.5 in. (38 mm)

1.5 in. (38 mm)

1.5 in. (38 mm)