
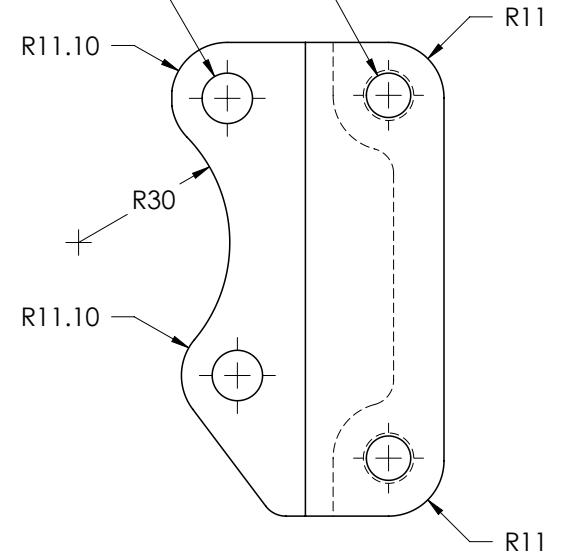


2X Ø 8.80 THRU ALL  
M10X1.25 - 6H THRU ALL

2X Ø 10 THRU



REVISIONS

REV.	DESCRIPTION	DATE
1	<ul style="list-style-type: none"> <li>INCREASED HOLE CENTERS TO 72mm</li> <li>ADDED 2.88mm OFFSET</li> <li>INCREASED STOCK THICKNESS</li> </ul>	23/10/2008

TOLERANCE UNLESS OTHERWISE SPECIFIED			
MILLIMETERS		INCHES	
<100	±0.20	.XX ( M/C SURF. )	± .010
>100 <300	±0.30	.XX (NON M/C SURF.)	± 1/32
>300 <1000	±0.40	.XXX	± .003
>1000	±0.80	FRACTIONS	± 1/32
ANGLES ±30°	✓ <sub>xx</sub>	ANGLES ±30°	✓
FIN. μ		FIN. MICRO. INCH	✓
CONCENTRICITY	.05	.002 T.I.R.	
SQUARENESS	.05	.002 T.I.R.	
PARALLEL	.15	.005	
FINISHED WT.		0.29 Kg	

**KAWASAKI KH 400**

**EX CALIPER BRACKET**

DRAWN: A.WALMSLEY

SIZE <b>A</b>	FSCM NO.	DWG. No. EX 500 caliper adaptor	REV. 1
SCALE 1:1.5	MATERIAL SAE 1045	SHEET P_T	DF T_T